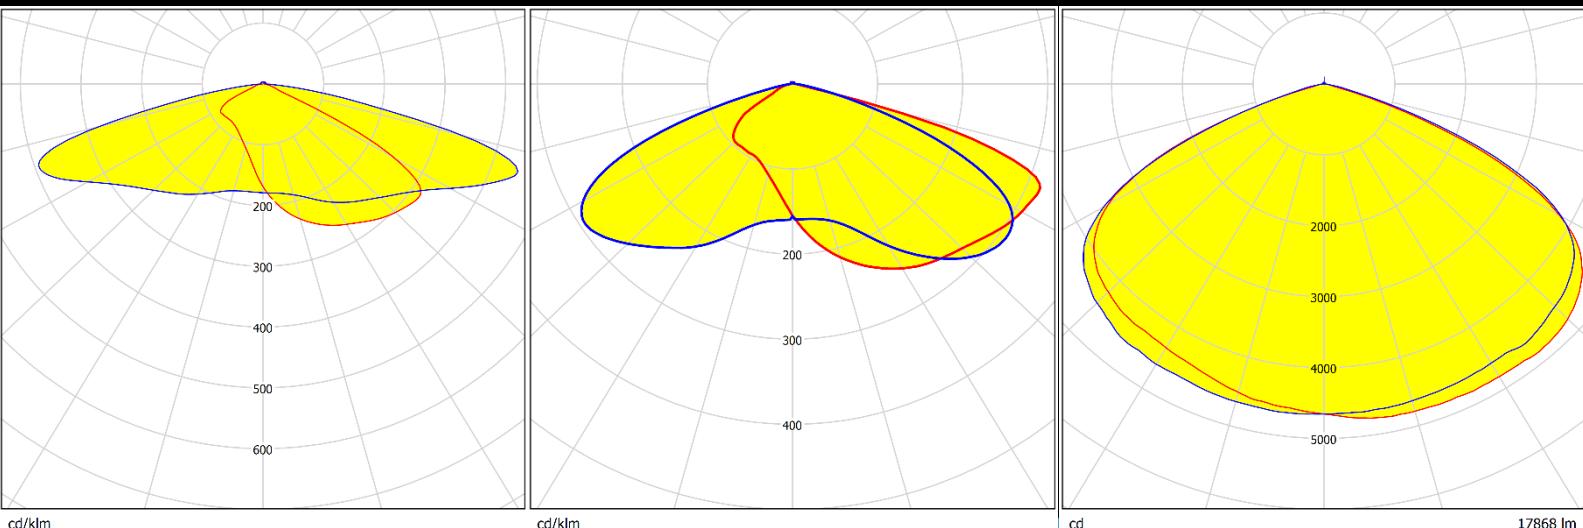
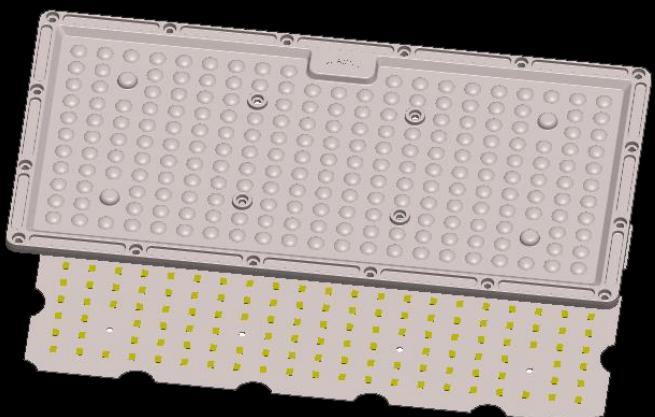
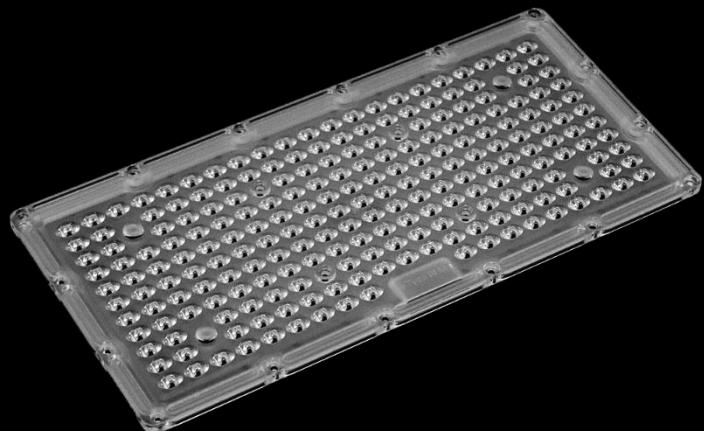


Data Sheet

HH-363-216×1-xx-PH2835



深圳市汉辉光电有限公司
shenzhen hanhui photoelectric co.,Ltd.

地址：深圳市宝安区石岩街道石龙仔社区恒昌荣高科科技园3栋3楼
ADD: Area A No.3 Building 3th Floor,Hengchang Rong Industrial
park shiyan,shilong community,Bao'an District,shenzhen,china
TEL:86-755-29232420 FAX:86-755-83723765
<http://www.szhanhui.com> <http://linsen4880.1688.com>



Data Sheet

catalogue

HANHUI® 汉辉
让光更完美

v1.0_20200803

General Information	P.1
Optical Specifications	P.2-4
Mechanical Specifications	P.5
Package Specifications	P.6

*Product Nomenclature

HH-363-216×1-xx-PH2835

H1 H2 H3 H4 H5 H6 H7

H1 : The company's initials in Pinyin (Han Hui)

H2 : Mold number

H3 : Lens quantity

H4 : The number of lamp beads inside each optical surface

H5 : Lens angle/type (ex : 60、90、T2M、T3M)

H6 : LED type (ex : CREE-CR、SAMSUNG-SS、PHILIPS-PH.....)

H7 : LED size (ex:2835、3030、3535、.....)



◆ Features & Typical Applications

- Available with 3 beam angles
- High efficiency
- optimized Uniformity
- Lens without Holder
- Roadway Light

◆ Material Information

Lens Material: PC 1225Z

Operating Temperature range -40°C ~ +110°C (upper limit +120°C).

Storage Temperature range -40°C ~ +110°C (upper limit +120°C).

*Average transmittance in visible spectrum 400nm~700nm>90%.

◆ Usage and Maintenance

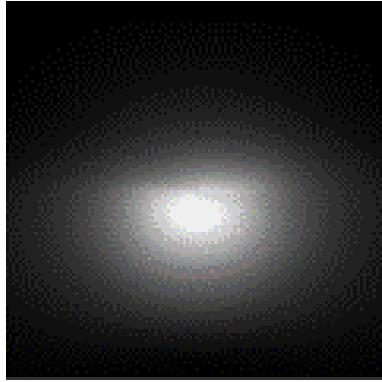
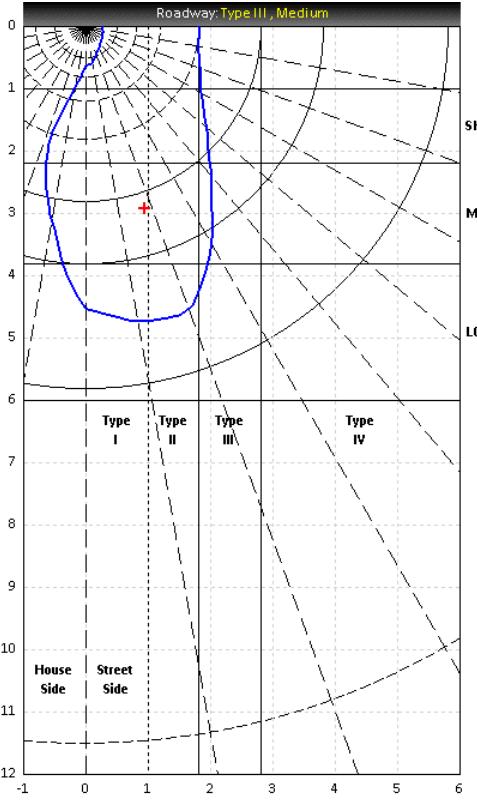
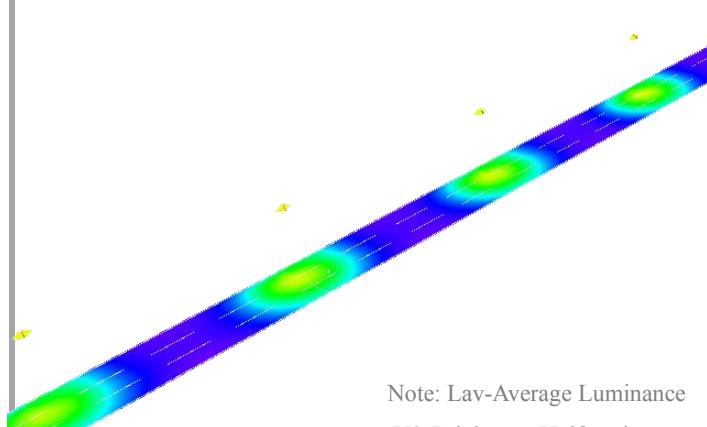
1. If necessary, clean lenses with mild soap, water and soft cloth.
2. Never use any commercial cleaning solvents on lenses, like alcohol.
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.



HH-363-216×1-xx-PH2835

Optical Specifications

v1.0_20200803

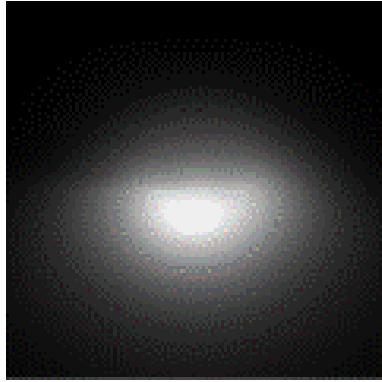
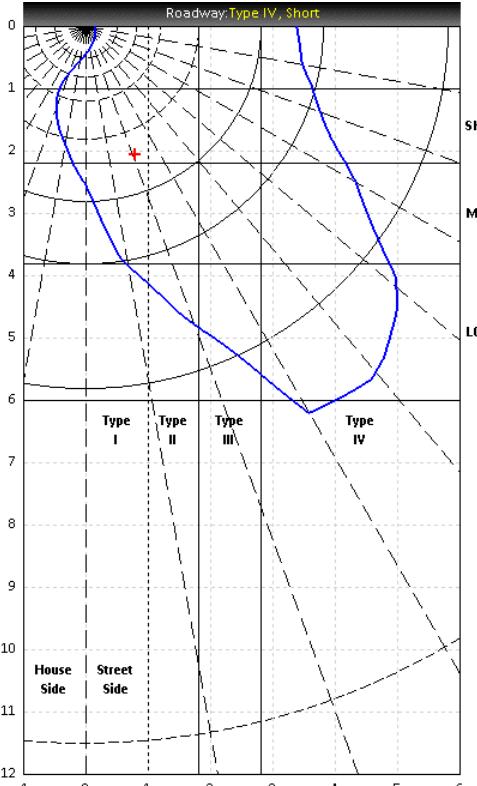
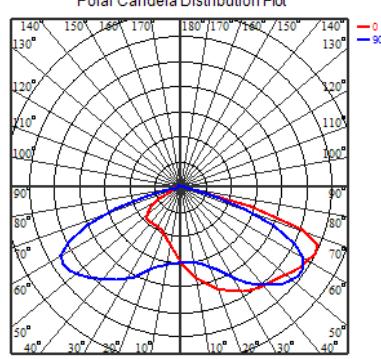
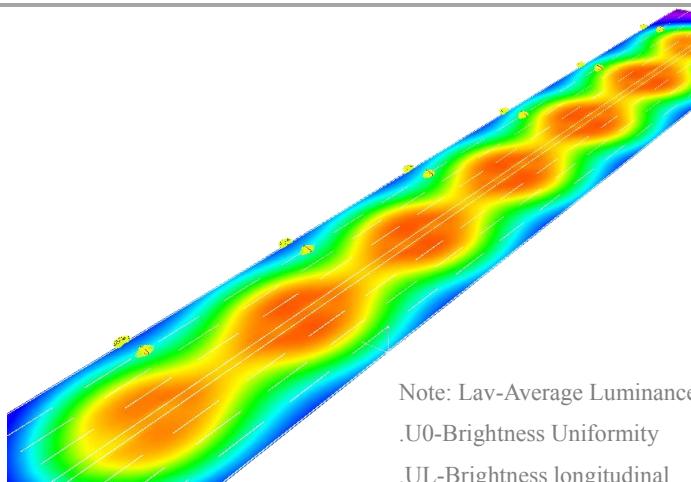
Part Number	FWHM	Field Angle*	IES File																							
HH-363-216×1-T3M-PH2835	65×160	T3-M	Download																							
																										
DIALux Simulation Result (three traffic lanes)																										
 Note: Lav-Average Luminance U0-Brightness Uniformity UL-Brightness longitudinal Uniformity TI-Threshold increment SR-Surround ratio		Recommend configuration condition <table border="1"> <tr> <td>Luminous Flux</td><td>20121m</td></tr> <tr> <td>Lamp Collocation</td><td>Unilateral arrangement</td></tr> <tr> <td>Height</td><td>12m</td></tr> <tr> <td>Distance</td><td>48m</td></tr> <tr> <td>Roadwidth</td><td>11.25m</td></tr> <tr> <td>Elevation</td><td>0°</td></tr> <tr> <td>Overhang</td><td>1m</td></tr> </table> Result <table border="1"> <tr> <td>Lav</td><td>0.92</td></tr> <tr> <td>U₀</td><td>0.49</td></tr> <tr> <td>U_L</td><td>0.74</td></tr> <tr> <td>TI(%)</td><td>13</td></tr> <tr> <td>SR</td><td>0.66</td></tr> </table>	Luminous Flux	20121m	Lamp Collocation	Unilateral arrangement	Height	12m	Distance	48m	Roadwidth	11.25m	Elevation	0°	Overhang	1m	Lav	0.92	U ₀	0.49	U _L	0.74	TI(%)	13	SR	0.66
Luminous Flux	20121m																									
Lamp Collocation	Unilateral arrangement																									
Height	12m																									
Distance	48m																									
Roadwidth	11.25m																									
Elevation	0°																									
Overhang	1m																									
Lav	0.92																									
U ₀	0.49																									
U _L	0.74																									
TI(%)	13																									
SR	0.66																									



HH-363-216×1-xx-PH2835

Optical Specifications

v1.0_20200803

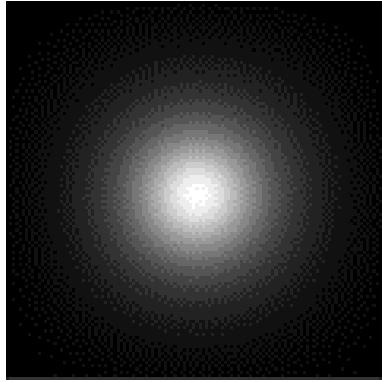
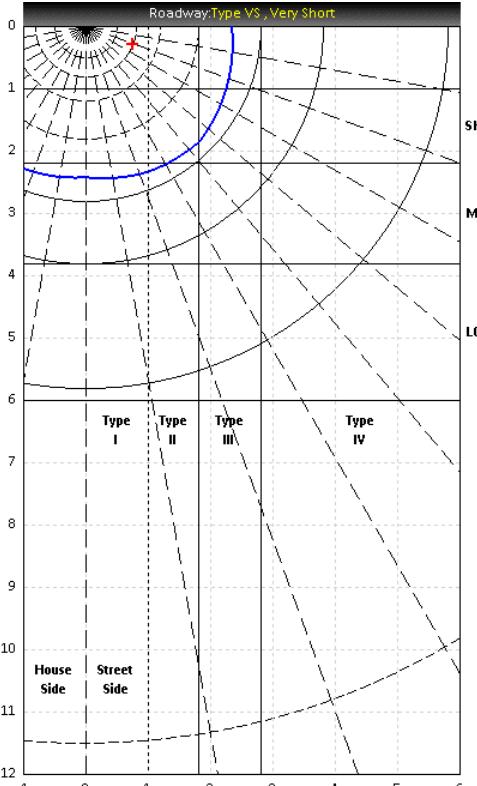
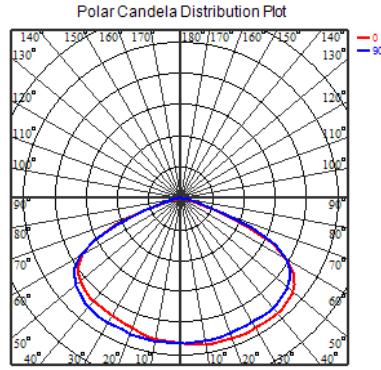
Part Number	FWHM	Field Angle*	IES File																												
HH-363-216×1-T4S-PH2835	70×150	T4-S	Download																												
																															
Polar Candela Distribution Plot																															
			DIALux Simulation Result (eight traffic lanes)																												
 <p>Note: Lav-Average Luminance .U0-Brightness Uniformity .UL-Brightness longitudinal Uniformity .TI-Threshold increment .SR-Surround ratio</p>			<table border="1"> <thead> <tr> <th colspan="2">Recommend configuration condition</th> </tr> </thead> <tbody> <tr> <td>Luminous Flux</td><td>19140m</td></tr> <tr> <td>Lamp Collocation</td><td>Bilateral Symmetry</td></tr> <tr> <td>Height</td><td>12m</td></tr> <tr> <td>Distance</td><td>30m</td></tr> <tr> <td>Roadwidth</td><td>30m</td></tr> <tr> <td>Elevation</td><td>0°</td></tr> <tr> <td>Overhang</td><td>1m</td></tr> <tr> <th colspan="2">Result</th></tr> <tr> <td>Lav</td><td>1.21</td></tr> <tr> <td>U₀</td><td>0.40</td></tr> <tr> <td>U_L</td><td>0.75</td></tr> <tr> <td>TI(%)</td><td>6</td></tr> <tr> <td>SR</td><td>0.88</td></tr> </tbody> </table>	Recommend configuration condition		Luminous Flux	19140m	Lamp Collocation	Bilateral Symmetry	Height	12m	Distance	30m	Roadwidth	30m	Elevation	0°	Overhang	1m	Result		Lav	1.21	U ₀	0.40	U _L	0.75	TI(%)	6	SR	0.88
Recommend configuration condition																															
Luminous Flux	19140m																														
Lamp Collocation	Bilateral Symmetry																														
Height	12m																														
Distance	30m																														
Roadwidth	30m																														
Elevation	0°																														
Overhang	1m																														
Result																															
Lav	1.21																														
U ₀	0.40																														
U _L	0.75																														
TI(%)	6																														
SR	0.88																														



HH-363-216×1-xx-PH2835

Optical Specifications

v1.0_20200803

Part Number	FWHM	Field Angle*	IES File
HH-363-216×1-T5S-PH2835	135×135	T5-S	Download
			
			



HH-363-216×1-xx-PH2835

Mechanical Specification

v1.0_20200803

Note: (1) All dimensions are in mm.
(2) All measurements are ± 0.15 mm unless otherwise indicated.

1.Fixing method

Glue

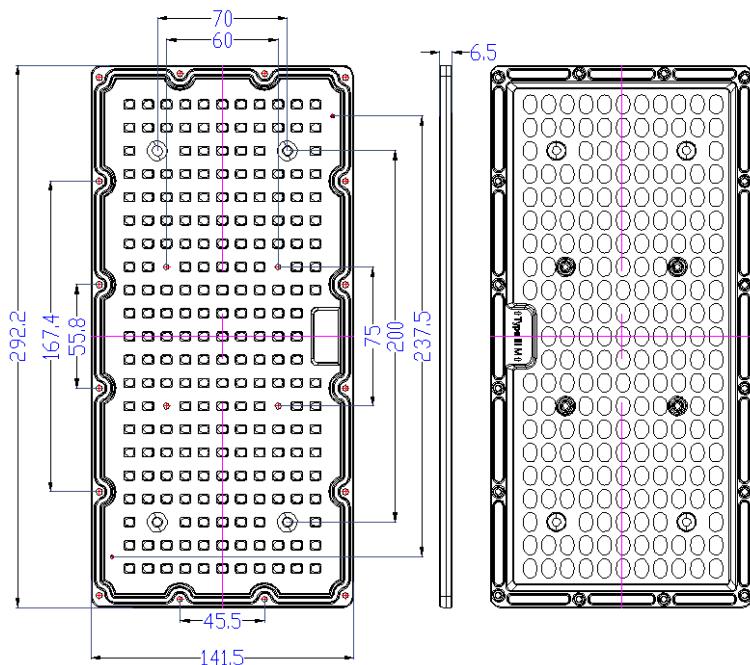
Screw

Tape

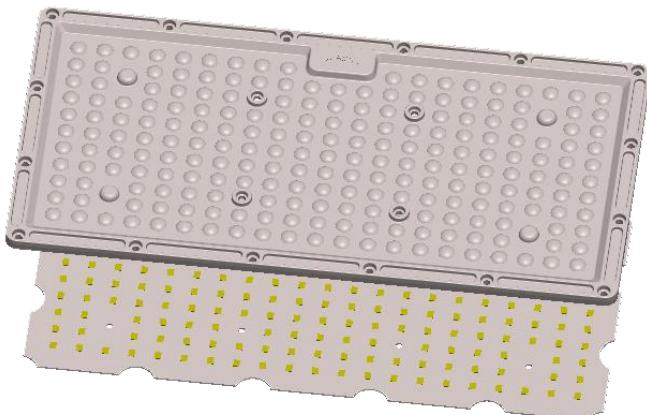
Fixing-ring

Frame

2.Lens dimension



3.Assembly instruction



4.View assembly lens with MCPCB



HH-363-216×1-xx-PH2835

Package Specifications

v1.0_20200803

Item	Quantity	Total	Size(L*W*H)	G.W
plastic box				
outer box				



Note:

