
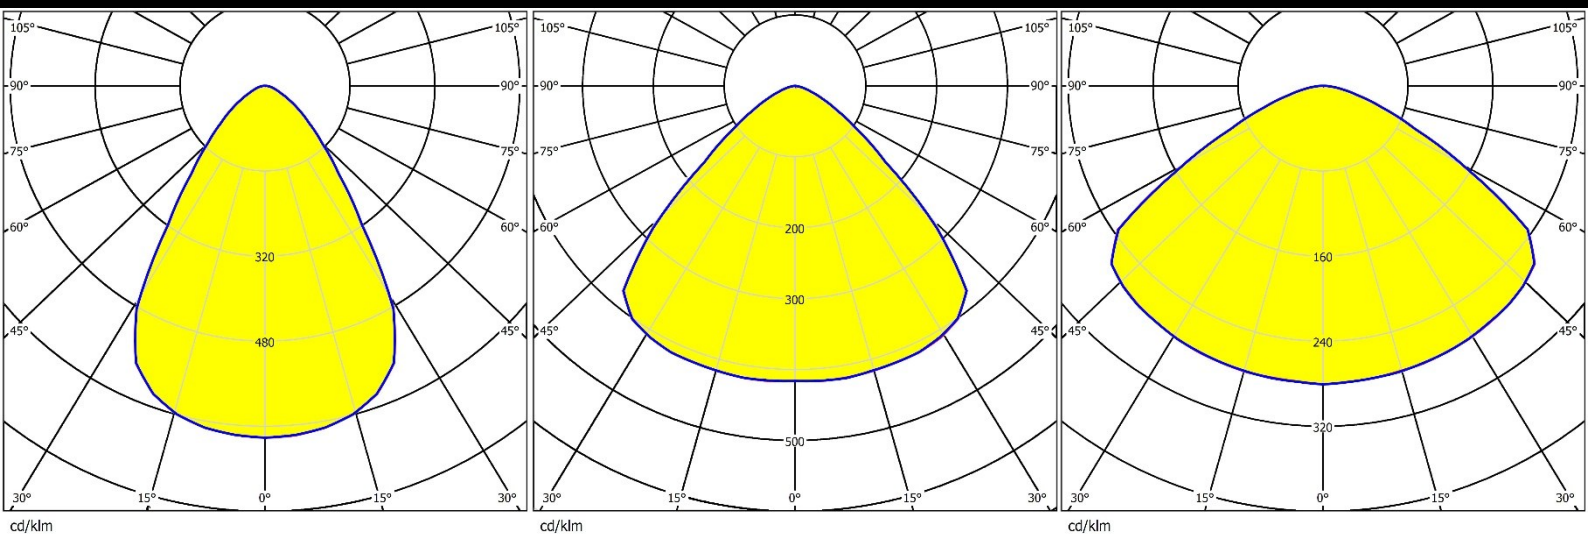
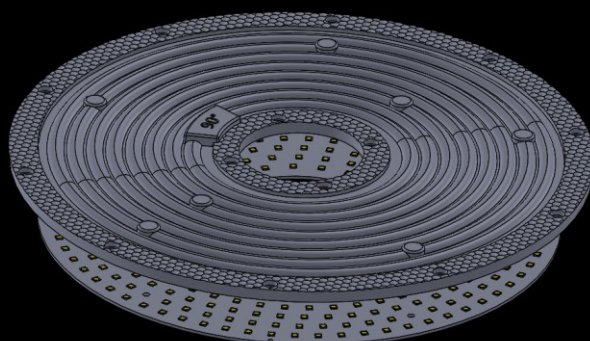


# Data Sheet

HH-539-8-xx-PH3030

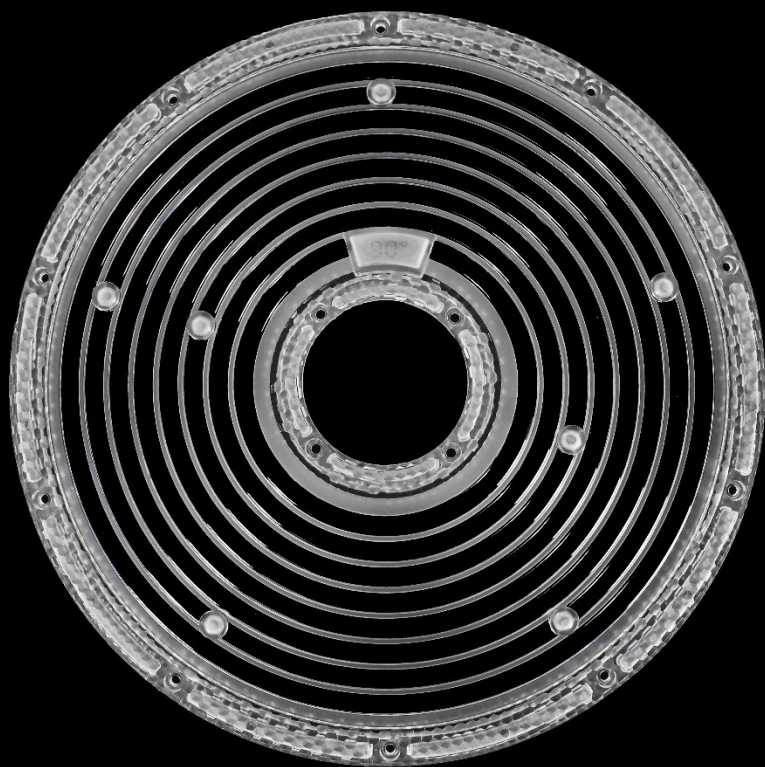

深圳市汉辉光电有限公司

Shenzhen Hanhui Photoelectricity Co., Ltd

地址：深圳市宝安区石岩街道水田社区石龙仔路71号1栋

ADD: Building 1, No. 71, Shilongzai Road, Shuitian Community,  
Shiyan Street, Bao'an District, Shenzhen, China

TEL: 86-755-29232420 FAX: 86-755-83723765

<http://www.szhanhui.com> <http://linsen4880.1688.com>



# Data Sheet

## catalogue

|                           |           |
|---------------------------|-----------|
| General Information       | .....P.1  |
| Optical Specifications    | .....P.2  |
| Mechanical Specifications | .....P.3  |
| Package Specifications    | ..... P.4 |

### \*Product Nomenclature

**HH-539-8-xx-PH3030**

H1            H2            H3            H4            H5            H6

H1: The company's initials in Pinyin (Han Hui)

H2: Mold number

H3: Lens quantity

H4: Lens angle/type (ex: 60、90、T2M、T3M)

H5: LED type (ex: CREE-CR、SAMSUNG-SS、PHILIPS-PH.....)

H6: LED size (ex:2835、3030、3535、.....)



# HH-539-8-xx-PH3030

## General Information

v1.0\_20230413

### ◆ Features & Typical Applications

- Available with 3 beam angles
- High efficiency
- optimized Uniformity
- Lens without Holder
- High Bay Light

### ◆ Material Information

Lens Material: PC 1225Z

Operating Temperature range  $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$  (upper limit  $+120^{\circ}\text{C}$ ).

Storage Temperature range  $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$  (upper limit  $+120^{\circ}\text{C}$ ).

\*Average transmittance in visible spectrum  $400\text{nm} \sim 700\text{nm} > 90\%$ .

### ◆ Usage and Maintenance

1. If necessary, clean lenses with mild soap, water and soft cloth.
2. Never use any commercial cleaning solvents on lenses, like alcohol.
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.








# HH-539-8-xx-PH3030

## Optical Specifications

v1.0\_20230413

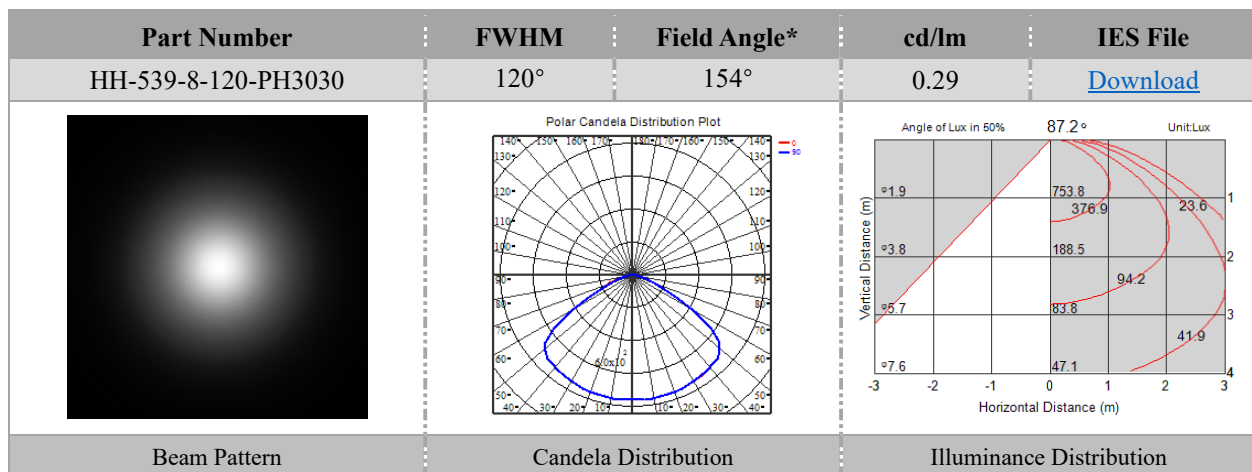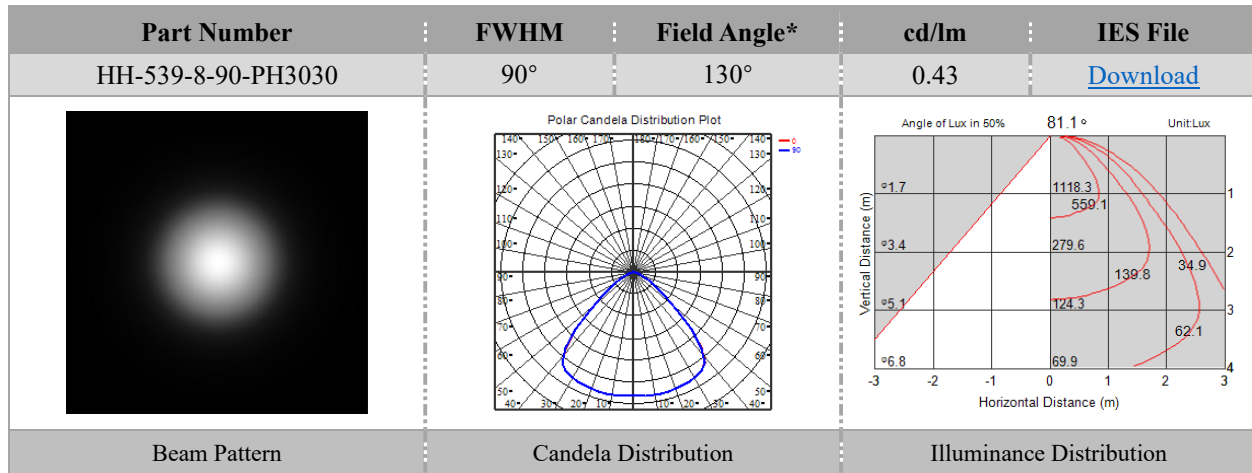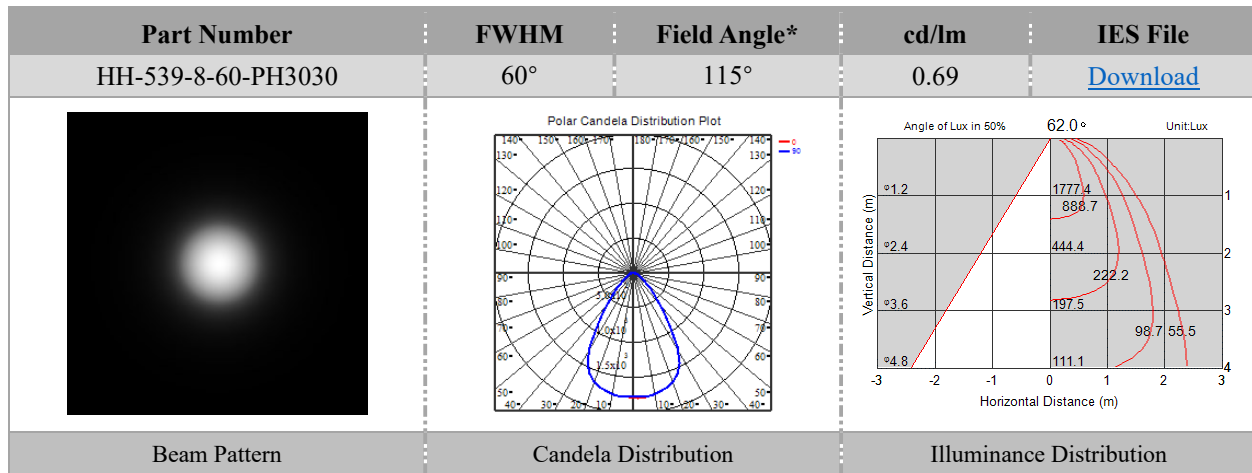

Note: (1) All dimensions are in mm.  
(2) All measurements are  $\pm 0.15\text{mm}$  unless otherwise indicated.

## 1. Fixing method

☐ Glue


☐ Screw

- Tape


□ Fixing-ring

□ Frame


## 2. Lens dimension

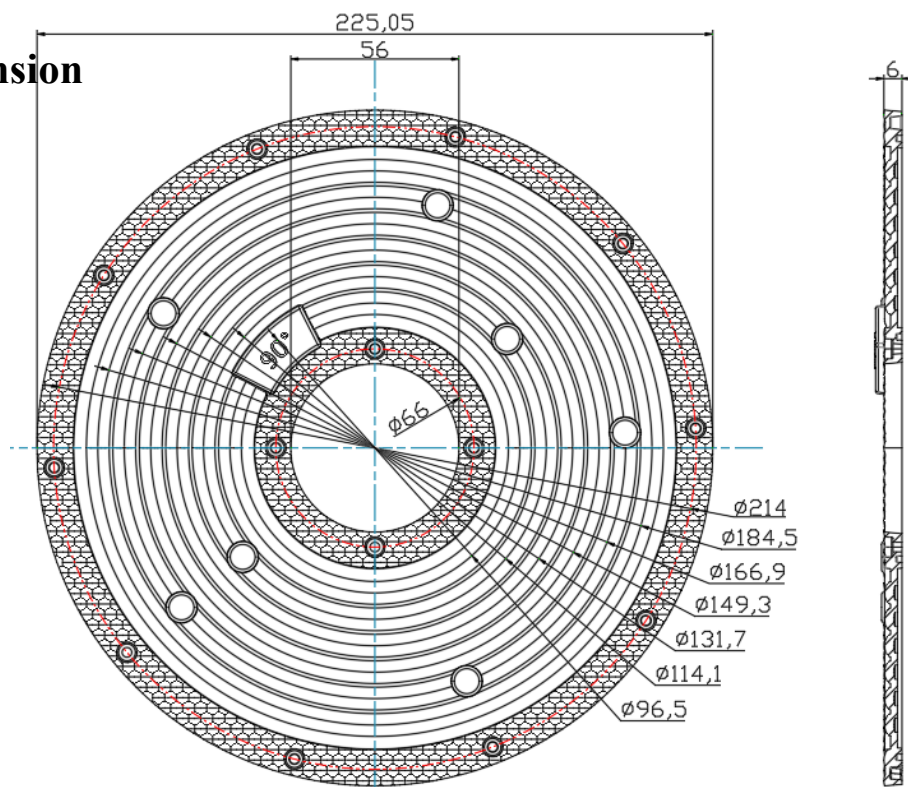

### 3.Assembly instruction

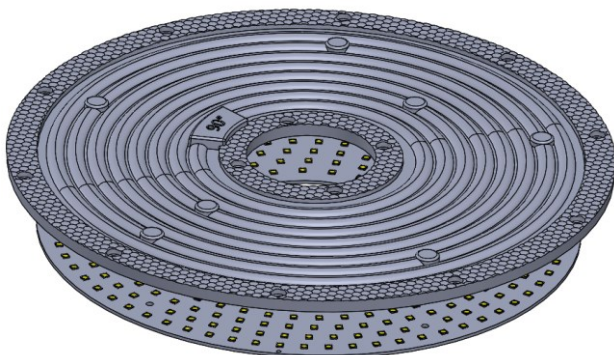

#### 4.View assembly lens with MCPCB

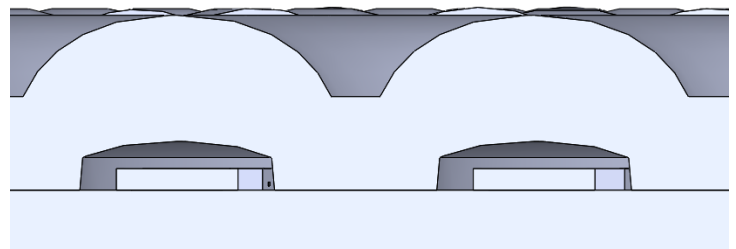

HH-539-8-xx-PH3030

Package Specifications

v1.0\_20230413

| Item        | Quantity | Total | Size(L*W*H) | G.W |
|-------------|----------|-------|-------------|-----|
| plastic box |          |       |             |     |
| outer box   |          |       |             |     |



Note:

